



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

REC'D 13 JUL 2004

WIPO

PCT

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

03252656.8

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**



Anmeldung Nr:  
Application no.: 03252656.8  
Demande no:

Anmeldetag:  
Date of filing: 25.04.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SHELL INTERNATIONALE RESEARCH  
MAATSCHAPPIJ B.V.  
Carel van Bylandtlaan 30  
2596 HR Den Haag  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Expander system for incremental expansion of a tubular element

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

E21B23/00

An Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

TS 6428 EPC

EXPANDER SYSTEM FOR INCREMENTAL EXPANSION  
OF A TUBULAR ELEMENT

5 The present invention relates to an expander system  
for radially expanding a tubular element from a first  
inner diameter to a second inner diameter larger than the  
first inner diameter. Expansion of tubular elements finds  
increasing use in the industry of hydrocarbon fluid  
production from an earth formation, whereby boreholes are  
drilled to provide a conduit for hydrocarbon fluid  
flowing from a reservoir zone to a production facility to  
surface. Conventionally such borehole is provided with  
10 several tubular casing sections during drilling of the  
borehole. Since each subsequent casing section must pass  
through a previously installed casing section, the  
different casing section are of decreasing diameter in  
downward direction which leads to the well-known nested  
15 arrangement of casing sections. Thus the available  
diameter for the production of hydrocarbon fluid  
decreases with depth. This can lead to technical and / or  
economical drawbacks, especially for deep wells where a  
relatively large number of separate casing sections is to  
20 be installed.

To overcome such drawbacks it has already been  
practiced to use a casing scheme whereby individual  
casings are radially expanded after installation in the  
borehole. Such casing scheme leads to less reduction in  
25 available diameter of the lowest casing sections.  
Generally the expansion process is performed by pulling,  
pumping or pushing an expander cone through the tubular

pumping or pushing an expander cone through the tubular element (such as a casing section) after the tubular element has been lowered into the borehole. However the force required to move the expander cone through the tubular element can be extremely high since such force has to overcome the cumulated expansion forces necessary to plastically deform the tubular element and the frictional forces between the expander cone and the tubular element.

EP-0643794-A discloses a system for expanding a tubular element using a tool movable between a radially retracted mode and a radially expanded mode. The tubular element is expanded in cycles whereby in each cycle the tool is positioned in a portion of the tubular element whereby the tool is in the retracted mode, and subsequently the tool is expanded thereby expanding said tubular element portion in a single step. Next the tool is to be repositioned accurately in the tubular element before the expansion cycle can be repeated. Experience has shown that expanding such portion of the tubular element in a single step is difficult as it requires a large degree of expansion of the expander.

It is an object of the invention provide an improved expander system which overcomes the drawbacks of the prior art.

In accordance with the invention there is provided an expander system for radially expanding a tubular element having an unexpanded portion of a first inner diameter, the expander system including an expander movable between a radially retracted mode and a radially expanded mode, wherein the expander includes an expansion surface extending in axial direction of the expander, the expansion surface being operable to expand the tubular

element from said first inner diameter to a second inner diameter larger than the first inner diameter by movement of the expander from the retracted mode to the expanded mode thereof, said expansion surface being of increasing diameter in axial direction of the expander.

The term "unexpanded portion" of the tubular element is intended to refer to a portion of the tubular element which is to be expanded to a larger diameter. Thus it is to be understood that such "unexpanded portion" can be a portion which has not yet been subjected to expansion before or to a portion which has already been subjected to expansion.

In use the expander is arranged in the tubular element and moved from the retracted mode to the expanded mode whereby a section of the tubular element is expanded an incremental amount by a first portion of the expansion surface. Next the expander is moved to the retracted mode and repositioned in the tubular element until a second portion of the expansion surface is arranged opposite said expanded section of the tubular element, which second portion is of larger diameter than the first portion. Subsequently the expander is moved again to the expanded mode whereby the second portion of the expansion surface expands said section of the tubular element a further incremental amount. In this manner the tubular element is expanded from the first diameter to the second diameter in a plurality of incremental steps, while in each such step the expander only has to expand a fraction of the difference between the first and second diameters.

To reposition the expander in a simple way after each expansion step, suitably the expander comprises a contact surface for contacting the inner surface of the tubular element, said contact surface being of a diameter larger

than said first inner diameter when the expander is in the radially retracted mode thereof.

Preferably said contact surface has a smallest diameter smaller than said first inner diameter, and a  
5 largest diameter larger than said first inner diameter.

The contact surface suitably forms at least part of the expansion surface.

To achieve uniform expansion of the tubular element, said expansion surface suitably is arranged to move  
10 radially outward in substantially uniform manner along the length of the expansion surface upon movement of the expansion surface from the retracted position to the expanded position thereof.

The invention will be described further by way of example in more detail, with reference to the  
15 accompanying drawings in which:

Fig. 1A schematically shows a side view of an embodiment of an expander for use in the system of the invention;

20 Fig. 1B schematically shows cross-section 1B-1B of Fig. 1A;

Fig. 2A schematically shows a side view of the expander of Figs. 1A and 1B with an additional sleeve connected thereto;

25 Fig. 2B schematically shows cross-section 2B-2B of Fig. 2A;

Fig. 3 schematically shows a side view of a first alternative embodiment of an expander for use in the system of the invention;

30 Fig. 4 schematically shows cross-section 4-4 of Fig. 3;

Fig. 5 schematically shows a longitudinal section of a second alternative embodiment of an expander for use in the system of the invention;

5 Fig. 6A schematically shows cross-section 6-6 of Fig. 5 when the expander is in retracted mode;

Fig. 6B schematically shows cross-section 6-6 of Fig. 5 when the expander is in expanded mode;

Fig. 6C schematically shows detail A of Fig. 6A; and

10 Figs. 7A-E schematically show various steps during normal use of the expander of Fig. 1.

In the Figures like reference numerals relate to like components.

Referring to Figs. 1A and 1B there is shown an  
15 expander 1 including a steel tubular expander body 2 having a first end 3 and a second end 4. The expander body 2 includes a cylindrical portion 2a, a cylindrical portion 2b, and a frustoconical portion 2c arranged between the cylindrical portions 2a and 2b. The  
20 frustoconical portion 2c tapers in the direction from the first end 3 to the second end 4, from a diameter D1 to a diameter D2 larger than D1. The cylindrical portions 2a, 2b have a diameter substantially equal to D1. A plurality of narrow longitudinal slots 6 are provided in the  
25 expander body 2, which slots are regularly spaced along the circumference of the expander body 2. Each slot 6 extends radially through the entire wall of tubular expander body 2, and has opposite ends 7, 8 located a short distance from the respective ends 3, 4 of the  
30 expander body 2. The slots 6 define a plurality of longitudinal body segments 10 spaced along the circumference of the expander body 2, whereby each slot 6 extends between a pair of adjacent body segments 10 (and vice versa). By virtue of their elongate shape and

elastic properties, the body segments 10 will elastically deform by radially outward bending upon application of a suitable radial load to the body segments 10. Thus the expander 1 is expandable from a radially retracted mode whereby each body segments 10 is in its rest position, to a radially expanded mode whereby each body segment 10 is in its radially outward bent position upon application of said radial load to the body segment 10.

The expander further includes cylindrical end closures 12, 14 arranged to close the respective ends 3, 4 of the expander body 2, each end closure 12, 14 being fixedly connected to the expander body 2, for example by suitable bolts (not shown). End closure 12 is provided with a through-opening 15.

An inflatable member in the form of elastomeric bladder 16 is arranged within the tubular expander body 2. The bladder 16 has a cylindrical wall 18 resting against the inner surface of the tubular expander body 2, and opposite end walls 20, 22 resting against the respective end closures 12, 14, thereby defining a fluid chamber 23 formed within the bladder 16. The end wall 20 is sealed to the end closure 12 and has a through-opening 24 aligned with, and in fluid communication with, through-opening 15 of end closure 12. A fluid conduit 26 is at one end thereof in fluid communication with the fluid chamber 23 via respective through-openings 15, 24. The fluid conduit 26 is at the other end thereof in fluid communication with a fluid control system (not shown) for controlling inflow of fluid to, and outflow of fluid from, the fluid chamber 23.

In Figs. 2A and 2B is shown the expander 1 whereby a tubular sleeve 28 is positioned concentrically over the cylindrical portion 2a of the expander 1, the sleeve 28



being provided with an end plate 29 bolted to the end closure 14. The sleeve 28 is of inner diameter slightly larger than the outer diameter of cylindrical portion 2a of the expander 1.

5           In Figs. 3 and 4 is shown a first alternative expander 31 including a steel tubular expander body 32 having a first end 33 and a second end 34. The expander 30 is largely similar to the expander 1 of Figs. 1 and 2 except that the expander body 32 includes two  
10       frustoconical portions 32a, 32b arranged between respective cylindrical portion 32c, 32d. The frustoconical portions taper in the direction from the respective ends 33, 34 towards the middle of the expander 31, from diameter D1 to diameter D2 larger than D1. The  
15       cylindrical portions 32c, 32d are of diameter substantially equal to D1.

          In Fig. 5 is shown a second alternative expander 41 including a tubular expander body 42 arranged in a partially expanded tubular element 43. The expander body 42 includes a plurality of separate elongate steel  
20       segments 46 regularly spaced along the circumference of the expander body 42. The expander body 42 includes a cylindrical portion 42a, a cylindrical portion 42b, and a frustoconical portion 42c arranged between the respective  
25       portions 42a and 42b. The frustoconical portion tapers from diameter D1 to diameter D2 larger than D1. End plates 47, 48 provided with respective annular stop shoulders 50, 52 are arranged at opposite ends of the  
30       expander body 42 to hold the segments 46 in place. The segments 46 are capable of being moved between a radially inward position (as shown in the upper half of Fig. 5) and a radially outward position (as shown in the lower half of Fig. 5) whereby the maximum radially outward

position of the segments 46 is determined by the annular stop shoulders 50, 52. Thus the expander 41 assumes a radially retracted mode when the segments 46 are in their respective radially inward positions, and a radially expanded mode when the segments 46 are in their respective radially outward positions.

The end plates 47, 48 have respective central openings 54, 56 through which a fluid conduit 54 extends, the end plates 47, 48 being fixedly connected to the conduit 54. A plurality of openings 58 are provided in the wall of fluid conduit 54 located between the end plates 47, 48.

Referring further to Figs. 6A, 6B is shown the expander 41 when in unexpanded mode (Fig. 6A) and when in expanded mode (Fig. 6B). The series of segments 46 includes segments 46a and segments 46b alternately arranged in circumferential direction of the expander body 42. Each segment 46a is at the outer circumference thereof provided with a pair of oppositely arranged lips 60, and each segment 46b is at the outer circumference thereof provided with a pair of oppositely arranged recesses 62, whereby each lip 60 of a segment 46a extends into a corresponding recess 62 of an adjacent segment 46b. For the sake of clarity not all segments 46a, 46b are shown in Figs. 6A, 6B. The segments of each pair of adjacent segments 46a, 46b are interconnected by an elongate elastomer body 64 vulcanised to the segments 46a, 46b of the pair. The elastomer bodies 64 bias the segments 46 to their respective radially inward positions and seal the spaces formed between the segments 46.

Furthermore the segments 46 are sealed to the end plates 47, 48 by elastomer vulcanised to the segments 46 and to the end plates 47, 48 so that a sealed fluid chamber 66

is formed in the space enclosed by the segments 46 and the end plates 47, 48.

5 In Fig. 6C is shown detail A of Fig. 6A, whereby it is indicated that each lip 60 is provided with a shoulder 70 and the corresponding recess 62 into which the lip 60 extends is provided with a shoulder 72, the shoulders 70, 72 being arranged to cooperate to prevent the lip 60 from moving out of the corresponding recess 62 when the expander 41 is radially expanded.

10 Normal use of the expander 1 (shown in Figs. 1A, 1B) is explained hereinafter with reference to Figs. 7A-7D showing various stages of an expansion cycle during expanding a steel tubular element 40 extending into a wellbore (not shown) formed in an earth formation whereby  
15 the expander is positioned in the tubular element 40 and the conduit 26 extends through the tubular element 40 to the fluid control system located at surface. The largest outer diameter D2 of the expander 1 when in unexpanded mode is larger than the inner diameter d1 of the tubular  
20 element 40 before expansion thereof.

In a first stage (Fig. 7A) of the expansion cycle the expander 1 is positioned in the tubular element 40 whereby the expander 1 is in the radially retracted mode thereof. The tubular element 40 has an expanded portion  
25 40a with inner diameter d2 at the large diameter side of the expander 1, an unexpanded portion 40b with inner diameter d1 at the small diameter side of the expander 1, and a transition zone 40c tapering from the unexpanded portion 40b to the expanded portion 40a. Part of the  
30 frustoconical portion 2c of the expander 1 is in contact with the inner surface of the tapering transition zone 40c of the tubular element 40.

In a second stage (Fig. 7B) of the expansion cycle the fluid control system is operated to pump pressurised fluid, for example drilling fluid, via the conduit 26 into the fluid chamber 23 of the bladder 16. As a result the bladder 16 is inflated and thereby exerts a radially outward pressure against the body segments 10 which thereby become elastically deformed by radially outward bending. The volume of fluid pumped into the bladder 16 is selected such that any deformation of the body segments 10 remains below the elastic limit. Thus the body segments 10 revert to their initial positions after release of the fluid pressure in the bladder 16. The amount of radially outward bending of the body segments 10 is small relative to the difference between  $d_2$  and  $d_1$ . Thus the expander 1 is expanded upon pumping of the selected fluid volume into the bladder 16, from the radially retracted mode to the radially expanded mode thereof. Consequently the tapering transition zone 40c and a short section of the unexpanded portion of the tubular element 40 become radially expanded by the expander 1, whereby the amount of expansion corresponds to the amount of radially outward bending of the body segments 10. Such radial expansion of the tubular element 40 is in the plastic domain since the tubular element 40 will be subjected to hoop stresses beyond the elastic limit of the steel of the tubular element 40.

In a third stage (Fig. 7C) of the expansion cycle the fluid control system is operated to release the fluid pressure in the bladder 16 by allowing outflow of fluid from the fluid chamber 23 back to the control system. The bladder 16 thereby deflates and the body segments 10 move back to their initial undeformed shape so that the expander 1 moves back to the radially unexpanded mode

thereof. As a result a small annular space 42 will occur between the frustoconical portion 2c of the expander body 2, and the inner surface of the expanded transition zone 40c of the tubular element 40.

5 In a fourth stage (Fig. 7D) of the expansion cycle the expander 1 is moved forward (i.e. in the direction of arrow 80) until the frustoconical portion 2c of the expander 1 is again in contact with the inner surface of the tapering transition zone 40c of the tubular element 10 40 whereby the annular space 42 vanishes. The body segments 10, if not yet fully back to their initial undeformed shape, further move back to their initial undeformed shape due to being pulled or pushed against the inner surface of the tubular element 40. Forward 15 movement of the expander 1 is achieved by applying a moderate pulling- or pushing force to the fluid conduit 26 at surface.

Next the second stage is repeated (Fig. 7E) followed by repetition of the third and four stages. The cycle of 20 second stage, third stage and fourth stage is then repeated as many times as required to expand the entire tubular element 40 or, if desired a portion thereof.

Normal use of the first alternative expander 31 (shown in Figs. 3, 4) is similar to normal use of the 25 expander 1 described above. An additional advantage of the first alternative expander 31 is that radially outward deformation of each body segment 10 upon movement of the expander 31 from the radially retracted mode to the radially expanded mode occurs more uniformly along 30 the length of the body segment 10.

Normal use of the second alternative expander 41 (shown in Figs. 5, 6A, 6B) is substantially similar to normal use of the expander 1 described above, except that

in the second stage of each expansion cycle pressurised fluid is pumped from the fluid control system via the conduit 54 and the openings 58 into the sealed fluid chamber 66 rather than into the bladder 16 of the embodiment of Figs. 1, 2. Upon pressurising the fluid chamber 66 the elongate steel segments 46 are biased radially outward until stopped by the stop shoulders 50, 52. Thus the radial outermost position of the segments 46 is determined by the annular stop shoulders 50, 52 thereby ensuring uniform radial expansion of the tubular element 40 in circumferential direction. Radially outward movement of the segments 46 implies an increase of the spacing between the segments 46, which in turn implies stretching in circumferential direction of the elastomer bodies 64 interconnecting the segments 46. Furthermore, during outward movement of the segments 46, the lip 60 of each segment 46a moves gradually out of the corresponding recess 62 of the adjacent segment 46b so that the fluid pressure in the fluid chamber 66 is transferred via the elastomer bodies to the portions of lips 60 which have moved out of the corresponding recesses 62. It is thereby achieved that the fluid pressure P in the fluid chamber 66 acts on a fictitious inner surface of fluid chamber 66 of diameter corresponding to the inner diameter of the lips 60. Since the available expansion force at the outer surface of the expander body 42 increases with increasing diameter of such fictitious inner surface, the inner diameters of the lips 60 suitably are selected as large as possible.

Normal use of the expander 1 provided with the tubular sleeve 28 (shown in Figs. 2A, 2B) is substantially similar to normal use of the expander 1 without the tubular sleeve 28. The function of the sleeve

28 is to limit expansion of the cylindrical portion 2a of the expander 1 during the expansion of the tubular element 40, particularly at start-up of the expansion process when the cylindrical portion 2a still protrudes outside the tubular element 40. Since the inner diameter of the sleeve 28 is somewhat larger than the outer diameter of the cylindrical portion 2a, the portions of the segments 10 within the sleeve 28 are allowed to deform radially outward upon pressurising the bladder 16 until the sleeve 28 prevents such further radially outward deformation. It is thus achieved that excessive radially outward deformation of the segments 10 at the location of the cylindrical portion 2a is prevented.

Instead of applying an expander body provided with parallel longitudinal slots extending substantially the whole length of the expander body, an expander body can be applied provided with relatively short parallel longitudinal slots arranged in a staggered pattern, for example a pattern similar to the pattern of slots of the tubular element disclosed in EP 0643795 B1 (as shown in Figs. 1 and 3 thereof). Such staggered pattern has the advantage that widening of the slots during expansion of the expander is better controlled.

In the four stages of each expansion cycle described above fluid is induced to flow into the fluid chamber via the fluid conduit, and out from the fluid chamber via the fluid conduit, in alternating manner. Alternatively the expander can be provided with a controllable valve (not shown) for outflow of fluid from the expander to the exterior thereof.

Suitably the controllable valve is provided with electric control means, the valve being for example a servo-valve. Preferably the electric control means

comprises an electric conductor extending through the fluid conduit for the transfer of fluid from the control system to the inflatable member.

5 Normal use of such expander provided with a controllable valve is substantially similar to normal operation of the expander described above. However a difference is that in the third stage (Fig. 7C) of the expansion cycle, the valve is controlled to allow outflow of fluid from the fluid chamber via the valve to the exterior of the expander. That is to say the fluid flows into tubular element rather than back through the fluid conduit. Pumping of fluid from the control system via the fluid conduit into the fluid chamber can be done in a continuous or discontinuous way, while outflow of fluid from the fluid chamber is controlled by means of the valve.

10 In the above-described embodiments, the expander is alternately expanded and retracted by inducing fluid to flow into the fluid chamber, and inducing fluid to flow out from the fluid chamber in alternating mode. In an alternative system the expander is alternately expanded and retracted by alternately moving a body into the fluid chamber and out from the fluid chamber. Such body can be, for example, a plunger having a portion extending into the fluid chamber and a portion extending outside the fluid chamber. The plunger can be driven by any suitable drive means, such as hydraulic, electric or mechanical drive means.

25 Preferably the half top-angle of the frustoconical section of the expander is between 3 and 10 degrees, more preferably between 4 and 8 degrees. In the example described above the half top-angle is about 6 degrees.



Suitably the expander is a collapsible expander which can be brought into a collapsed state whereby the expander can be moved through the unexpanded portion of the tubular element.

5       The third and fourth stages of the expansion cycle described above can occur sequentially or simultaneously. In the latter case, the expander can be continuously in contact with the inner surface of the tubular element whereby the body segments return to their undeformed configuration during forward movement of the expander. 10       Suitably the restoring force for the body segments to return to their undeformed configuration results from such continuous contact of the body segments with the inner surface of the tubular element. Forward movement of 15       the expander is stopped upon the expander reaching its retracted mode.

      With the method described above it is achieved that a relatively large expansion ratio of the tubular element is achieved by expanding the tubular in incremental 20       steps, whereby for each incremental step the expander only needs to be expanded to a small expansion ratio (wherein expansion ratio is defined as the ratio of the diameter of the expander at a selected axial position thereof after expansion over said diameter before 25       expansion).

      Also, it is achieved that the tubular element is expanded by application of a moderate pulling force only, contrary to methods in the prior art whereby extremely high pulling forces are needed to overcome friction 30       between the expander and the tubular element.

      Furthermore, it is achieved that no accurate repositioning of the expander is needed after each expansion cycle since the expander is simply pulled

forward when in the retracted mode, until stopped by the portion of the tubular element not yet (fully) expanded.

C L A I M S

EXPANDER SYSTEM FOR INCREMENTAL EXPANSION  
OF A TUBULAR ELEMENT

1. An expander system for radially expanding a tubular element having an unexpanded portion of a first inner diameter, the expander system including an expander  
5 movable between a radially retracted mode and a radially expanded mode, wherein the expander includes an expansion surface extending in axial direction of the expander, the expansion surface being operable to expand the tubular element from said first inner diameter to a second inner  
10 diameter larger than the first inner diameter by movement of the expander from the retracted mode to the expanded mode thereof, said expansion surface being of increasing diameter in axial direction of the expander.
2. The expansion system of claim 1, wherein the expander  
15 comprises a contact surface for contacting the inner surface of the tubular element, said contact surface being of a diameter larger than said first inner diameter when the expander is in the radially retracted mode thereof.
- 20 3. The expander system of claim 2, wherein said contact surface has a smallest diameter smaller than said first inner diameter, and a largest diameter larger than said first inner diameter.
4. The expansion system of claim 2 or 3, wherein said  
25 contact surface forms at least part of the expansion surface.
5. The expander system of any one of claims 1-4, wherein the expansion surface is of continuously increasing diameter in axial direction of the expander.

6. The expander system of claim 5, wherein the expansion surface is a tapering surface.

7. The expander system of claim 6, wherein the expansion surface has a frustoconical shape.

5 8. The expander system of any one of claims 1-7, wherein said expansion surface is arranged to move radially outward in substantially uniform manner along the length of the expansion surface upon movement of the expander from the retracted mode to the expanded mode thereof.

10 9. The expander system of any one of claims 1-8, wherein the expander comprises an expander body including a plurality of body segments spaced along the circumference of the expander body, each segment extending in longitudinal direction of the expander and being movable  
15 between a radially retracted position and a radially expanded position.

10 10. The expander system of claim 9, wherein the expander body is provided with a plurality of longitudinal slots spaced along the circumference of the expander body, each  
20 said slot extending between a pair of adjacent body segments.

11. The expander system of claim 9 or 10, wherein each body segment is at both ends thereof integrally formed with the expander body.

25 12. The expander system of any one of claims 9-11, wherein the expander body is a tubular expander body, and wherein the expander includes an inflatable fluid chamber arranged within the tubular expander body so as to move  
each body segment radially outward upon inflation of the  
30 fluid chamber.

13. The expander system of claim 12, wherein said fluid chamber is formed within an inflatable bladder arranged within the tubular body.

14. The expander system of claim 12 or 13, further including a fluid flow control system for controlling inflow of fluid into the fluid chamber and / or outflow of fluid from the fluid chamber.

5 15. The expander system of claim 14, wherein the fluid flow control system is arranged to control said fluid inflow and said fluid outflow in alternating mode.

16. The expander system of claim 14 or 15, wherein the fluid control system includes a valve for controlling  
10 outflow of fluid from the inflatable fluid chamber.

17. The expander system of claim 16, wherein the valve is provided with electric control means arranged to control the valve.

18. The expander system of claim 17, wherein the electric control means comprises an electric conductor extending  
15 through a conduit for the transfer of fluid to or from the inflatable fluid chamber.

19. The expander system of any one of claims 1-18, wherein the tubular element extends into a borehole  
20 formed in an earth formation, and wherein the expander is arranged within the tubular element.

20. A method of radially expanding a tubular element using the expander system of any one of claims 1-19, comprising the steps of:

25 a) arranging the expander within the tubular element;  
b) moving the expander from the retracted mode to the expanded mode thereof so as to expand the tubular element;

30 c) moving the expander from the expanded mode to the retracted mode thereof;

d) allowing the expander to move a selected distance through the tubular element by the action of an axial force exerted to the expander, said selected distance

being smaller than the length of the expansion surface in axial direction of the expander; and

5 e) repeating steps b)-d) until the expander has expanded the tubular element or a desired portion thereof, from the first diameter to the second diameter.

21. The expander system substantially as described hereinbefore with reference to the drawings.

22. The method substantially as described hereinbefore with reference to the drawings.

TS 6428 EPC

A B S T R A C T

EXPANDER SYSTEM FOR INCREMENTAL EXPANSION  
OF A TUBULAR ELEMENT

An expander system for radially expanding a tubular element from a first inner diameter to a second inner diameter larger than the first inner diameter, the expander system including an expander movable between a radially retracted mode and a radially expanded mode, wherein the expander includes an expansion surface extending in axial direction of the expander and being operable to expand the tubular element upon movement of the expander from the retracted mode to the expanded mode thereof, said expansion surface being of increasing diameter in axial direction of the expander.

ES/TS6428PD

TS 6428 E12

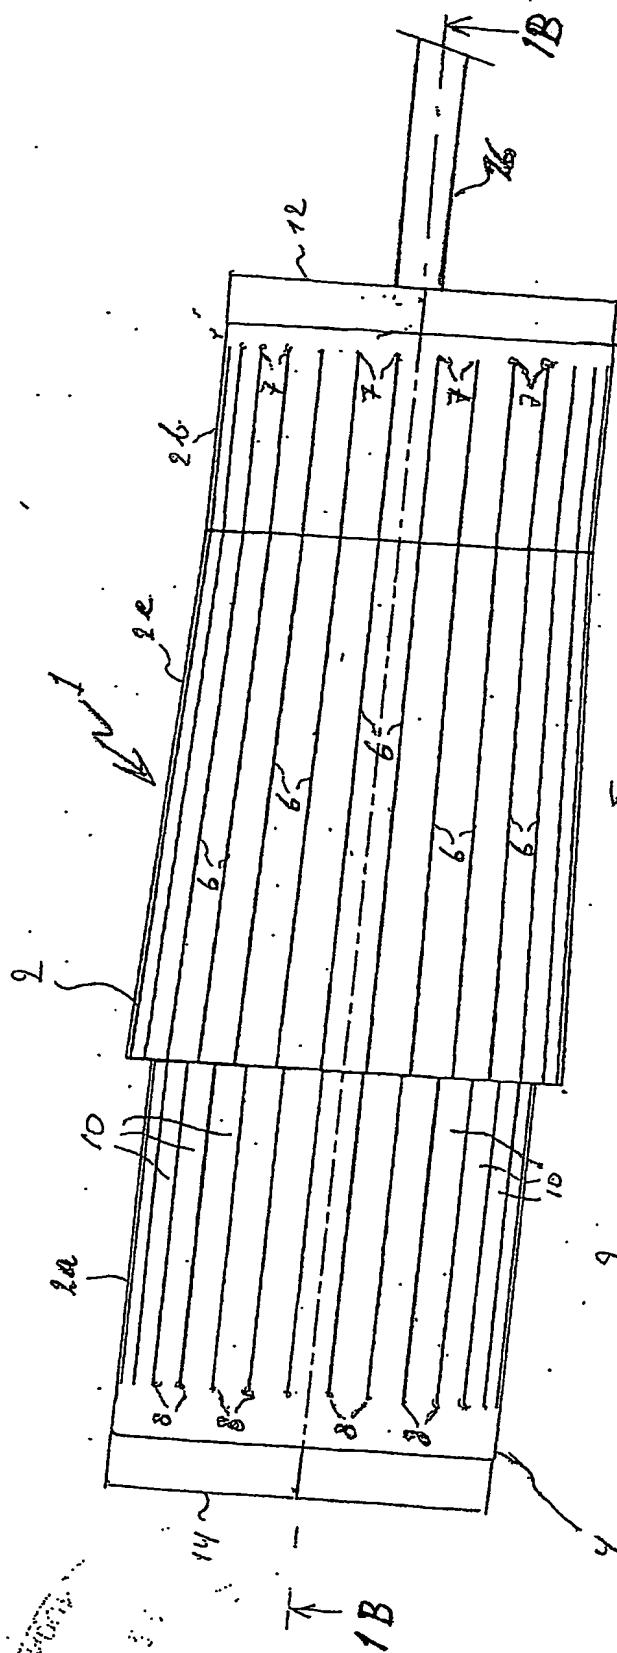


FIG. 1A

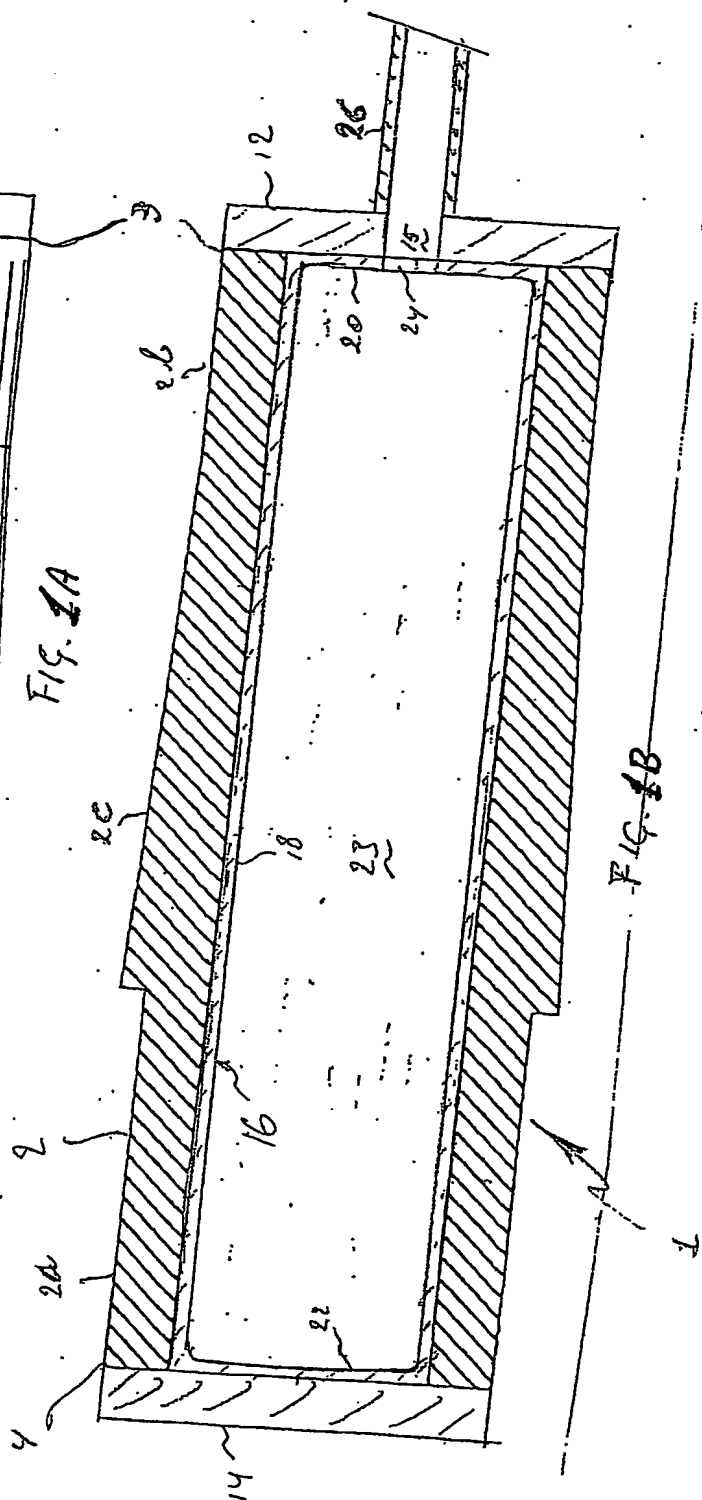


FIG. 1B



[illegible]

15 6478 EPC

FIG. 4


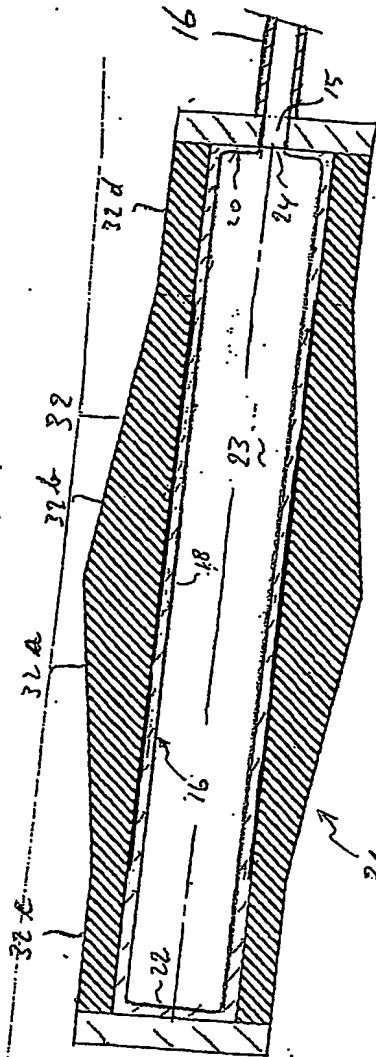


FIG. 3

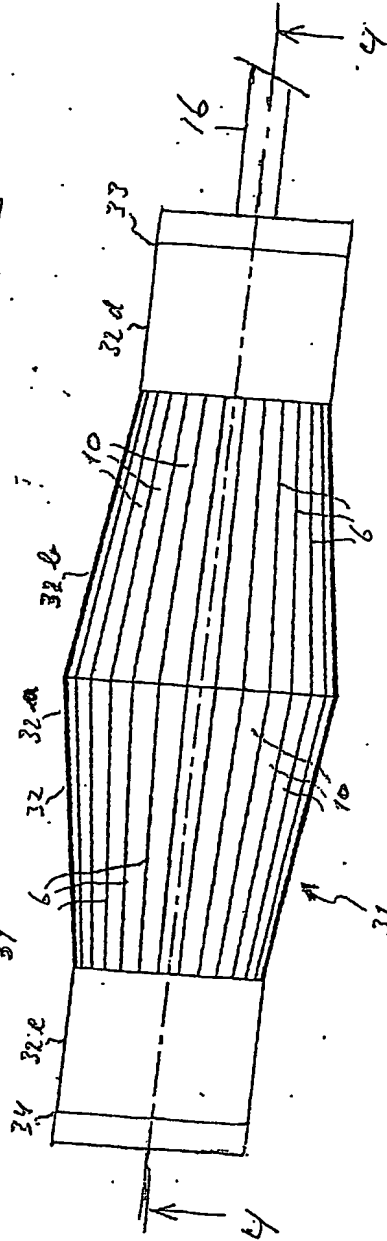

TS GUN8 EPL

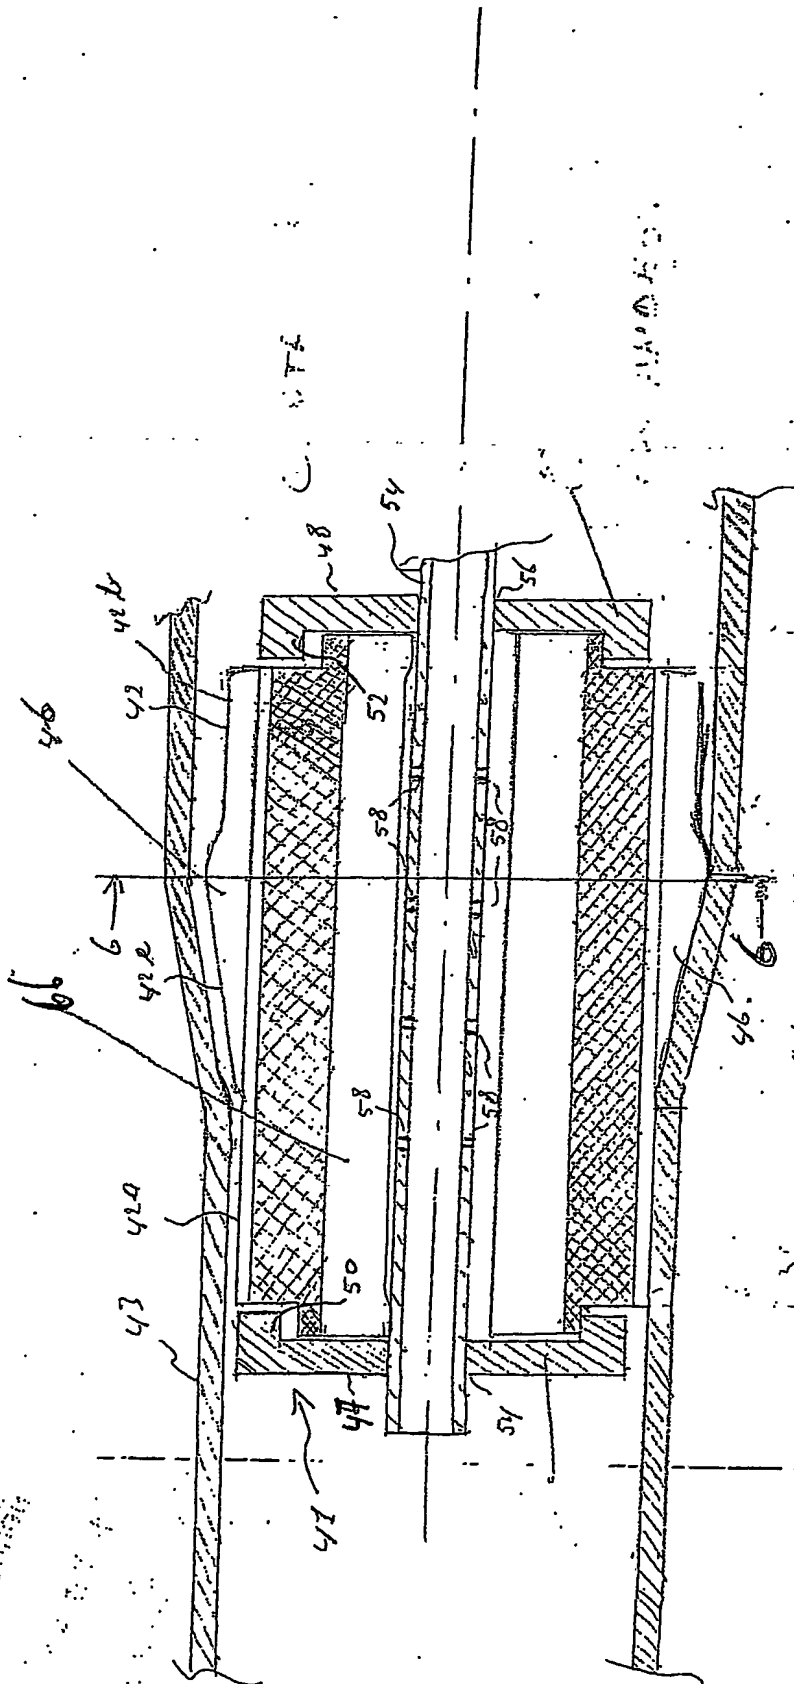


Fig. 5

TS 6478 EPL

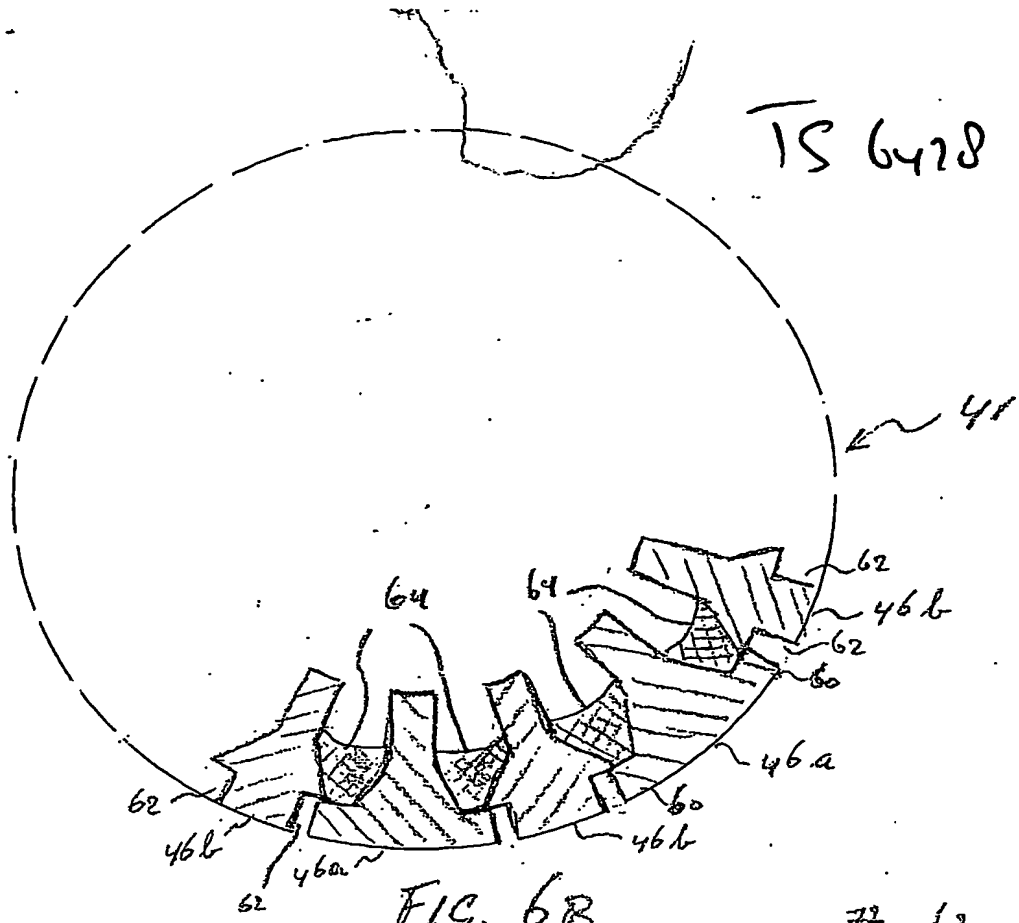


FIG. 6B

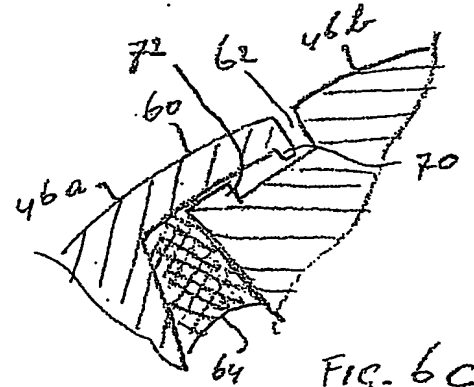


FIG. 6C






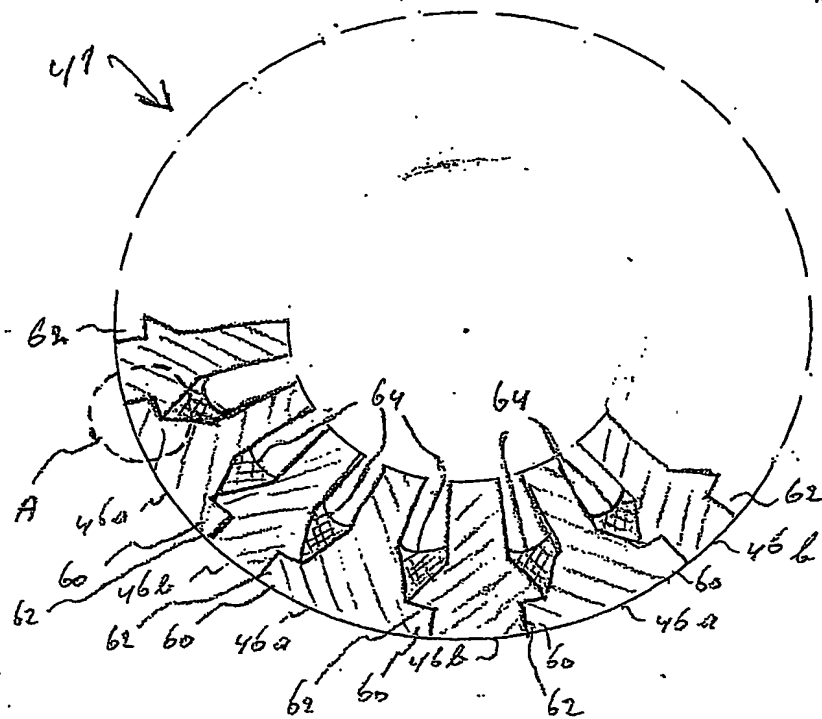


FIG. 6A

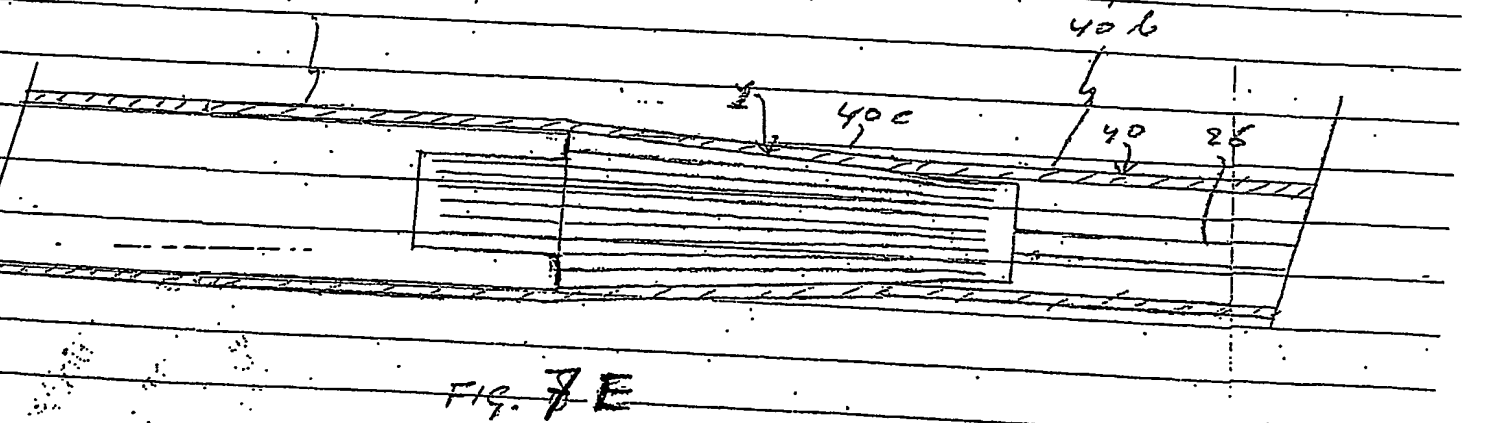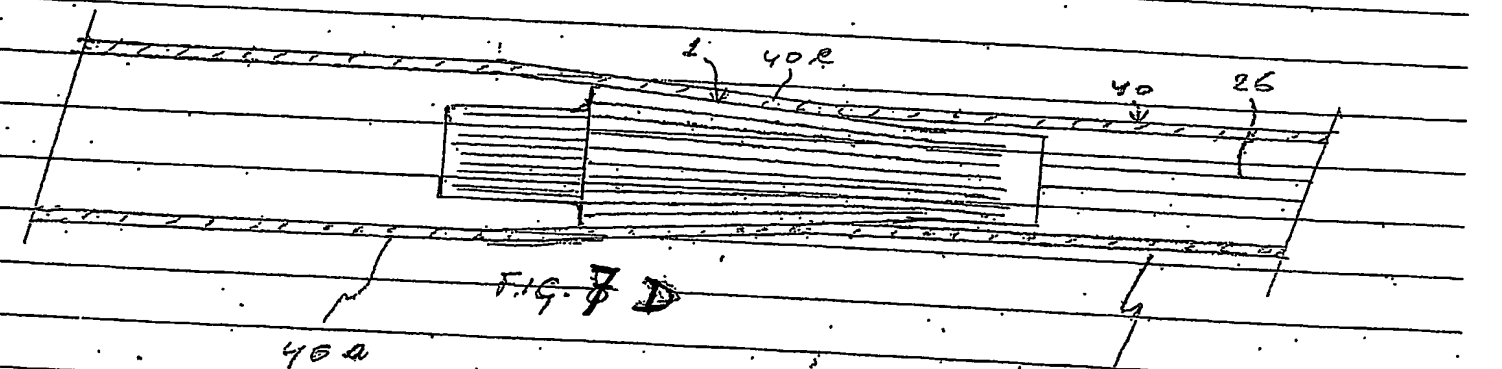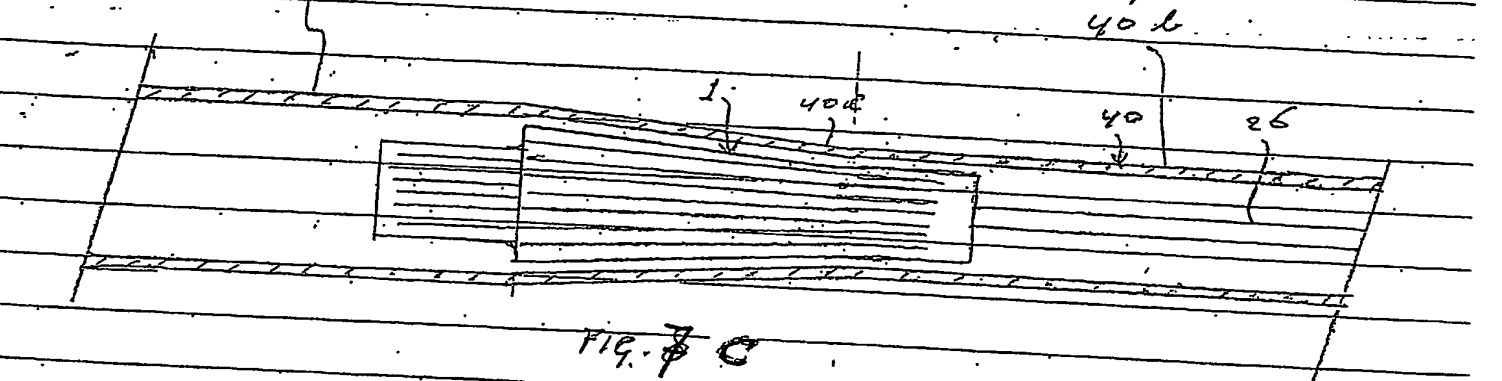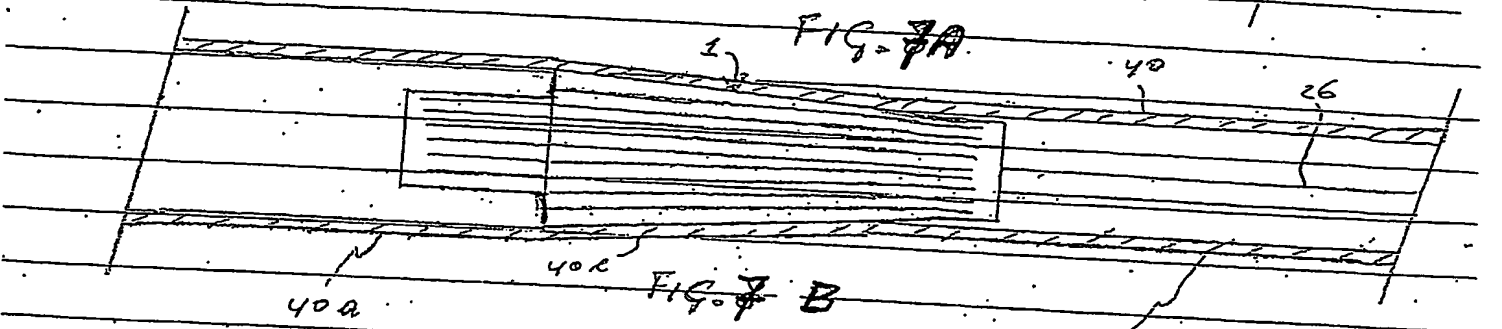

PCT/EP2004/050548

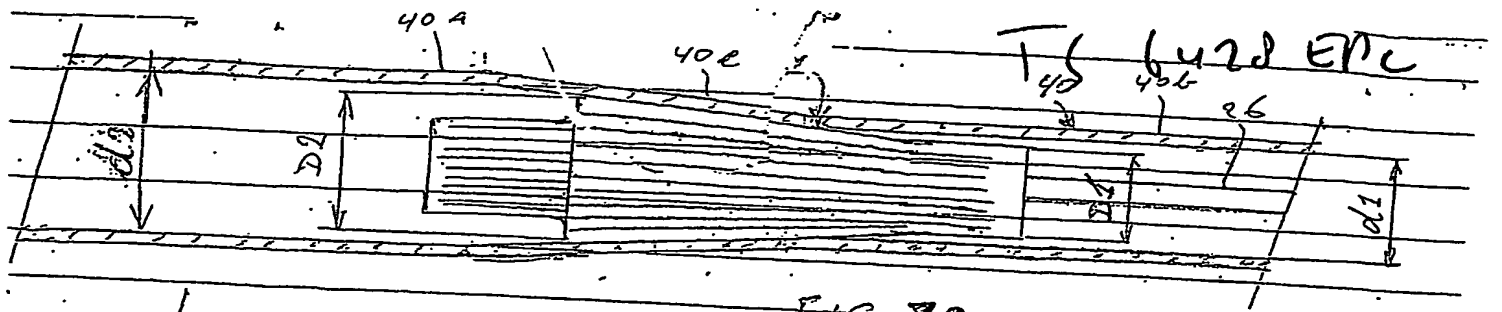